

Carli Suspension
422 Jenks Circle,
Corona, CA 92880



Tech Support:
888-99-CARLI
(888) 992-2754

CS-DPRB-14

NOTE:

We Recommend installation be performed by a trained professional. Please review the product instructions prior to attempting installation to ensure installer is equipped with all tools and capabilities necessary to complete the product installation. We recommend thoroughly reading the instructions at least twice prior to attempting Installation.

Before beginning disassembly of the vehicle, check the "What's Included" section of the instructions to ensure you've received all parts necessary to complete installation. Further, verify that the parts received are PROPER TO YOUR application (year range, motor, etc.) to avoid potential down-time in correcting potential discrepancies. Any discrepancies will be handled by Carli Suspension and the correcting products will be shipped UPS Ground.

LIFETIME PRODUCT WARRANTY

Carli Suspension provides a limited lifetime product warranty against defects in workmanship and materials from date of purchase to the original purchaser for all products produced by Carli Suspension. Parts not manufactured by, but made to Carli Suspension's specifications by third party manufacturers will carry a warranty through their respective manufacturer. (i.e. King Shocks, Bilstein Shocks, Fox Shocks). Deaver Leaf Spring's warranty will be processed by Carli Suspension.

Proof of purchase (from the original purchaser only) will be required to process any warranty claims. Carli Suspension products must be purchased for the listed Retail Price reflected by the price listed on the Carli Suspension Website at the time of purchase. Carli Suspension reserves the right to refuse warranty claims made by any customer refusing or unable to present proof of purchase, or presenting proof of purchase reflecting a price lower than Carli Suspension's Retail Price at the time the item was purchased.

Carli Suspension's Limited Lifetime Warranty excludes the following parts which are subject to wear: Track Bar Bushings, Track Bar Heim Joints, Limit Straps, Control Arm Bushings, Radius Arm Bushings, Shock Bushings, Sway Bar End Link Heim Joints, Shock Seals, Shock Bearings, and Corrosion on Shock Shafts or Bodies. These items will be warranted for a period of 60 days from the date of purchase only if determined to be installed properly signifying manufacturing defect. Carli Suspension cannot warrant a product's cosmetic finish due to the varying extreme elements that may be encountered.

Any alterations, modifications, or improper installation, of the product will void this warranty. Products should be inspected for defect upon receipt and approved before installation. Any defect in NEW product will be warranted if returned before installation in its original packaging. Carli Suspension's obligation under this warranty is limited to the repair or replacement of the defective product only. All costs of removal, installation or reinstallation, freight charges, incidental or consequential damage are expressly excluded from this warranty.


Carli Suspension is not responsible for damages and/or warranty of other vehicle parts related or non-related to the installed Carli Suspension product. This warranty shall not apply to any product that has been subjected to accident, negligence, alteration, abuse or misuse as determined by Carli Suspension. Carli Suspension reserves the right to refuse warranty claims if produced parts are combined and/or substituted with other aftermarket suspension products. Combination and/or substitution of other aftermarket suspension components may cause premature wear and/or product failure. Carli Suspension reserves the right to change/alter product without obligation to update any previously purchased products.

What's Included

- Track Bar
- Uniball:
 - (Qty 1) Snap Ring
 - (Qty 1) Silver Thick Spacer
 - (Qty 1) Black Thin Spacer
- Jam Nut
- Bushing Rod End
- (Qty 2) 3/8" Button Head Bolts
- (Qty 1) 1/2" Button Head Bolt
- (Qty 1) 1/2" Flange Nyloc Nut

Disassembly:

1. With the truck on the ground, remove O.E.M track bar from the vehicle. The truck can be under its own weight or on a lift; this step is at the discretion of the installer.
2. Remove the top two factory bolts that secure the factory stabilizer bracket to the axle. Replace these with the provided (2) 3/8" Button Head Bolts. Torque them to 25 ft lbs.

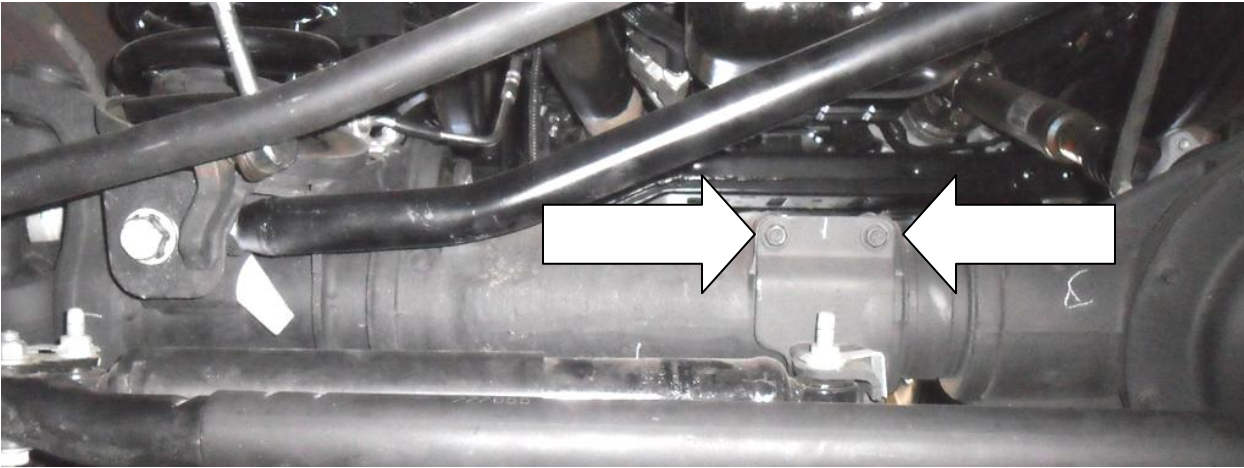

3. Use the provided 1/2" button head bolt to replace the factory axle side steering stabilizer bolt. Ensure the nut faces the ground and torque to 35 ft.lbs.



Installation:

4. Thread the jam nut onto the rod-end containing the captured bushing if not already assembled. Jam nut should be threaded all the way to the end of the threads so it's tight against the actual bushing housing.
5. Apply a light coat of anti-seize to the last few threads on the rod-end and thread it into the end of the bar.
6. For a 3", Carli lifted truck, set the Carli adjustable track bar to 39-1/8" from the center of the Uniball to the Center of the captured bushing.

NOTE: Factory height trucks will require the track bar to be set to factory length, as will any lift that utilizes a track bar drop bracket meant for the factory track bar.

7. Insert Uniball end of the track bar into a secured vise to prevent rotation while torquing the rod-end jam nut. Clean any anti-seize off the exposed threads after adjusting to the appropriate length and apply red-loctite to the threads where the jam nut will assemble to the end of the track bar.
8. Torque the jam nut to 150 ft.lbs (preferably using a crow's foot or huge crescent wrench) ensuring the alignment of the rod-ends is parallel to one another.



9. With the bar now assembled, slide the captured bushing into the axle pocket and assemble with the factory hardware; hand tight is fine for now.
10. Assemble the uniball utilizing the provided thin (black) spacer so it faces the rear of the truck and the thick (silver) spacer facing the front.



11. Slide the assembly into the frame side bracket and install 18mm, factory bolt and nut to secure the uniball.
NOTE: If the bar won't align with the upper bracket, key the truck on and have someone move the steering wheel until you're able to insert the bolt. You will need to extend the drag link to recenter the steering wheel after lifting the vehicle during your alignment anyway.
12. Torque the Upper assembly to 255ft.lbs and the lower to 255ft.lbs.
13. Periodically, check the assembly to ensure it remains torqued.